



INSTALLATION SHEMATICS

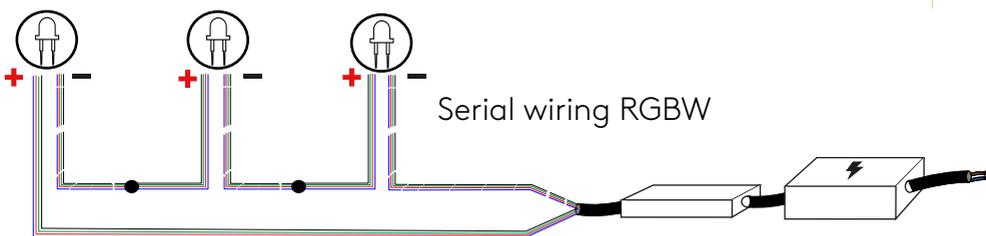

Lumière à la Française depuis 2008

www.orsteel-light.com
+33 (0)4 93 85 98 30

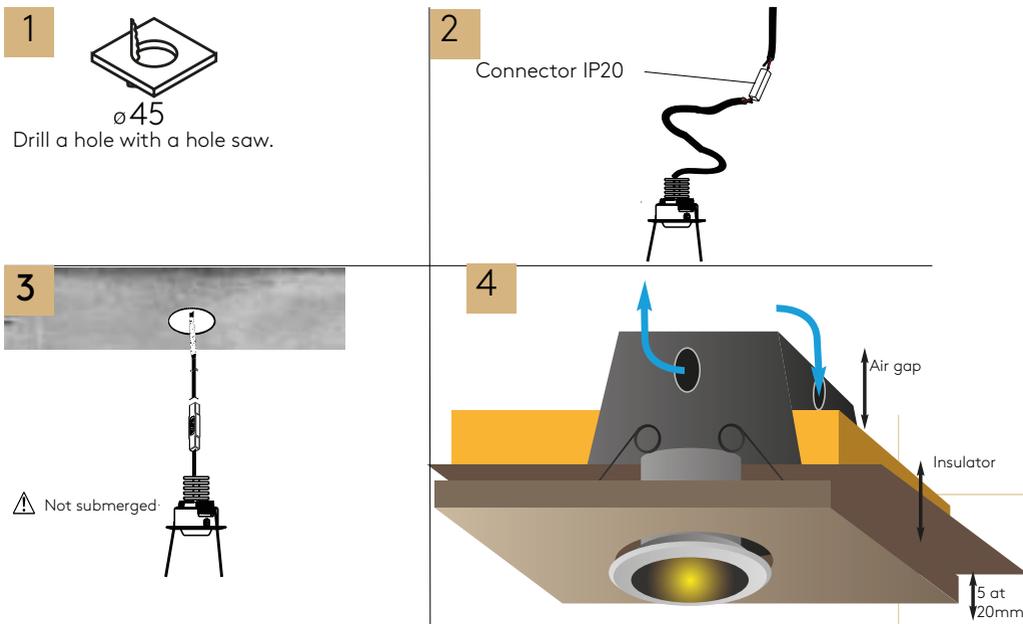

All data are given for information purposes only. They do not constitute a contractual commitment on our part and are subject to change at any time.



VISION RGBW/DYNAMIC WHITE 350mA



The ceiling recessed Vision swivel spotlight can be flush mounted in a straight or sloping suspended ceiling. It provides authentic, modern interior architectural lighting. This spotlight is used to highlight specific objects, so it is best installed for accent lighting or in small spaces.

| Electrical features | |
|---------------------|--------------|
| POWER | 1x5W |
| SUPPLY | 350mA |
| POWER SUPPLY | Not included |
| WIRING | Serial |

| Mechanical characteristics | |
|----------------------------|-----------------|
| SIZE | Ø55x40x40 mm |
| WEIGHT | 0.07kg |
| MATERIAL | Solid Aluminium |

| Characteristics lighting techniques | |
|-------------------------------------|--|
| AVERAGE LIFE OF THE LED | 60 000 hours Certificated L90 B10 |
| COLOUR EMISSION | RGBW : Red - Green - Blue - 4000°K Dynamic white : 2700°K - 3000°K 4000°K - 6000°K |
| BEAM | 6°-25°-40-115° |
| INITIAL OUTFLOW | 2371 at 4000k |

| General characteristics | |
|-------------------------|--------------------------------|
| OPERATING TEMPERATURE | - 20°c ~+ 60° |
| PROTECTION RAITING | IP20 |
| RESISTANCE INDEX | IK04 |
| ENERGY CLASS | A /A+ /A++ |
| APPLICANCE CLASS | CLASS III |
| WALKOVER FIXTURE | NO |
| DRIVE-OVER FIXTURE | NO |
| POWER SUPPLY CABLES | Supply wire 8x0,22 mm2 in IP68 |
| PHOTOBIOLOGICAL SAFETY | Risk group I |

INSTALLATION GUIDE

1. Use

Spotlight to flush mount in a suspended ceiling. Interior architectural lighting. IP68 class watertight so it can be fitted in a damp atmosphere or a low-energy building. Only an IP68 connection to the electricity network ensures the IP68 degree of the product Manufacturing/special applications available on request.

2. Technical data/Assembly

Round or square trim in different finishes, with one 350mA 5W LED RGBW/W fixed by two steel springs with rubber protection. Delivered with a 8x0,22mm² 30cm long cable.

3. Installation/assembly

Please comply with the applicable national safety requirements We disclaim all responsibility for non-compliant use or assembly Similarly, we reject any responsibility for any modifications you may make to the light fittings. For their use, constant current spotlights must always be connected in series to the corresponding DC power supply (see power packs) (350mA). Do not disassemble the projector casing, because the cables and the plate are sealed Install the spotlight in a BA13 type or metal ceiling. We cannot supply universal installation instructions because ground conditions and the location will vary for each project. The pictograms show examples of typical installations.

When installing, it is advisable not to put rock wool around the product to ensure it is correctly ventilated. Use only the factory-connected cables. Please indicate the required cable length when ordering. In the event of mechanical stress, the cable must be installed in a protective conduit. The connection of the silicone cable to the supply must be carried out in a dry environment and, in the event of a direct connection in the ground, only connection units compatible with a joint sealing compound should be used. Connect the various conductors to power supplies in accordance with instructions. The maximum number of lights that can be connected is indicated in the power pack manual

4. Connecting to the power packs/connection matrix

Constant current spotlights must only be connected in series. If applicable, proceed with connection in series in separate load distribution units, the outside of which must also be protected against humidity using a sealing compound.

5. General Maintenance Instructions

Do not use detergents which are harmful to metals when cleaning the spotlight. The use of hydrochloric acid-based detergents on and around any parts of a stainless steel light fitting is totally forbidden. Regularly clean the spotlight and its mounting box to avoid any rust deposit

6. Warranty conditions

The following time limits and provisions of the warranty shall apply from the date of delivery: - 24 months for Orsteel spotlights. The warranty covers defects in materials, manufacturing defects and any treatment which is proven to be attributable to the manufacturer. Any damage resulting from the non-compliance with this user leaflet or any non-compliant repair is excluded from the warranty. We disclaim any guarantee where the installation has not been carried out according to the instructions or where unsuitable bulbs or connection cables have been used. We reserve the right to make any modification corresponding to technical advancement.

7. Important Notice

(The warranty becomes void in the event of non-compliance with the following points)

The absence of damage during transport must be verified before installation. Any assembling and installation, as well as any electrical work, must be carried out by qualified personnel.

To avoid any rust deposits, only stainless steel tools should be used.

The cable length for lamps must be chosen to avoid extending it in water or in a damp environment. Any subsequent claim for this reason will not be accepted.

A mounting distance of 10 cm between each device is strongly recommended to avoid mutual heating.

Equipment must be connected without current, otherwise surges in the power supply could damage the LEDs. There must be no primary voltage when changing LEDs.

When connecting the lamps, please ensure that polarity matches! A polarity error may damage the LED module.

The customer is advised to install protection against any over voltage compliant with standards DIN VDE 0100-443, DIN VDE 0100-534 and En 62305.

Please observe the measures against electrostatic discharge during all work on the spotlights, equipment and LEDs.